Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 15149

1008-<u>09</u> <u>S</u> <u>T</u> <u>K</u> <u>S</u> <u>S</u>
1 2 3 4 5 6

1	NO. OF PINS		09, 15, 25, 37
2	CONTACT TYPE	:	P-Male S-Female
3	SHELL PLATED	:	T - Tin shell
4	INSULATOR COLOR	:	B-blue K-black Y-yellow
5	MOUNTING TYPE	:	S-With jack screws & board lock R-With UNC#4-40 insert & board lock separate with screws O-Other options under requirements
6	CONTACT PLATED	:	S-Selective gold plated G-Gold plated

FEMALE

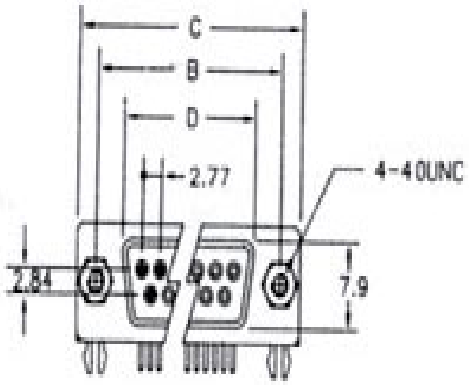

MALE

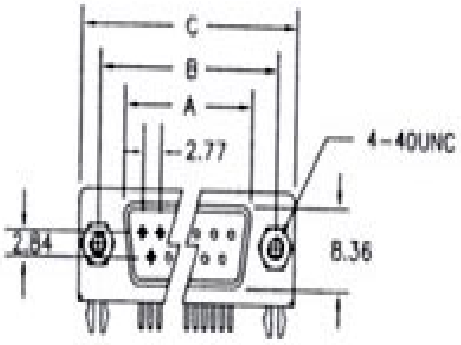





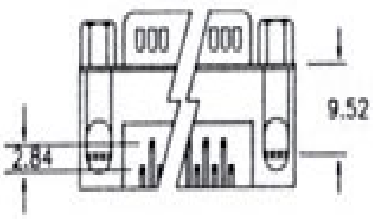



D-SUB RIGHT ANGLE TYPE (7.2mm)

Specifications:

Contact Resistance: 30mΩmax. at DC 100mA
Insulator Resistance: 1000MΩmin. at DC 500V
Current Rating: 5 AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute
Operating Temperature: -55°C~+105°C
Contact: Brass or Phosphor Bronze
Housing: PBT & 30% Glass Fiber (UL 94V-0)

Dimension

Position	A	B	C	D
9	16.92	24.99	30.81	16.33
15	25.25	33.32	39.14	24.66
19		39.03	44.80	29.92
23		44.36	50.30	35.18
25	38.96	47.04	53.04	38.38
37	55.42	63.50	69.32	54.84
50	52.86	61.11	66.90	52.34